




Rebel Comm Badge

Instructions and Maintenance

CAUTION – MAGNETIC DEVICE. DO NOT USE WITH PACEMAKER.

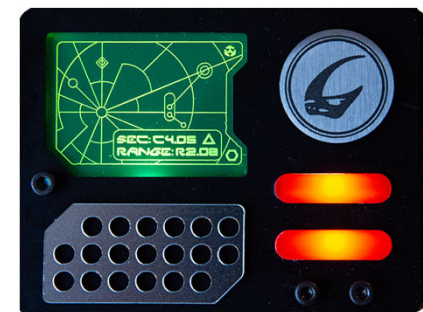

Thank you for purchasing the Rebel Comm Badge from The Outer Rim! Below are some instructions and maintenance tips, to help keep it working and looking like new.

Logo Disc Replacement



To remove and replace your logo disc, first slide it to the right, until you can see the magnet. Then lift it from the far right edge. This will prevent the disc from scratching the black layer. **DO NOT** lift straight up on the disc. The N52 neodymium magnet is so strong, that it can detach the magnet. If this happens, reattach the magnet using CA Glue. (Super Glue)

Back Plate Removal




To remove the magnetic backing plate, twist it until it comes free from the Comm Badge. **DO NOT** lift straight up on the plate. The badge magnets are so strong, that they can detach from the plate. If this happens, reattach the magnets using CA Glue. (Super Glue)

Battery Replacement

CR2032
Lithium Battery

Hold down here

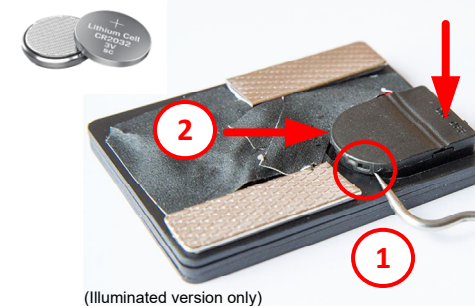

(Illuminated version only)

The illuminated Comm Badge uses a 3V CR-2032 Lithium Battery. To replace the battery, gently pry up the two tabs on the curved side of the battery case. Use a weeding hook, corkscrew or small flat screw driver for best results. Hold down on the back edge of the case when you do this, to prevent the whole case from getting pried off of the badge. If this happens, reattach the battery case using CA Glue. (Super Glue) Put new battery in with + side up.



Visit www.theouterrim.com to purchase additional logo discs.

Watch this short video for care and maintenance information.



**SCAN QR CODE TO
WATCH THE VIDEO!**